




AV IN



Indicator



DVD



DVB-S2 STB



Monitor




Video Recorder



Key Button

- 7 Inch High Definition TFT LCD Screen
- Fully DVB-S/S2X/T/T2/C, MPEG-2/MPEG-4 compliant
- MPEG-2 / H.264 / H.265(10 Bit) Hardware decoding
- Digital meter for signal strength and quality
- Constellation analyzer
- Spectrum analyzer
- Supports scan of Auto, Blind, Manual or NIT
- Sound and Light Alarm for Locking Signal
- Auto Calculate Angle of AZ, EL

- Supports DISEQC 1.0/1.1/1.2, Unicable, 0/22kHz Tone
- Speaker Integrated
- Support both AV out and AV in
- Support both HDMI out and HDMI in
- Support WiFi and Ethernet connection
- Optical Power measurement
- LNB short protect
- 7.4V/5000mAh Li+ Ion Battery Included
- Software upgrade via USB port
- Easy to carry

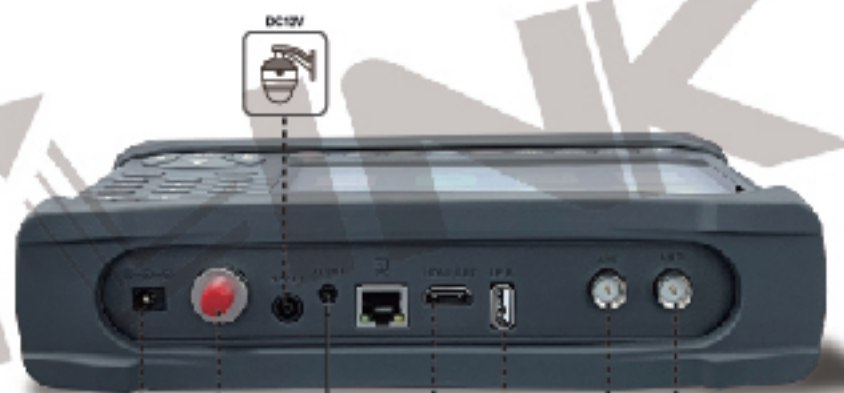

DC12V



12V Adapter



Optical Fiber Input



AV OUT



HDMI OUT



USB



Antenna



Satellite

TECHNICAL SPECIFICATIONS

TRANSMISSION STANDARDS		AUDIO/VIDEO PROCESSING	
DVB-S/S2X/T/T2/C ,MPEG-2,H.264/AVC,H.265/HEVC(10 Bit)		Video decompression	MPEG-2 MP@HL, MPEG-1 Decoding, MPEG-4 ASP@L5 HDR esolution,H.264 MP&HP@L4,HV JPEG decoding, HEVC/H.265(10 Bit)
SATELLITE INPUT/DEMODULATION			
Connector Type	F Type	Resolving rate	PAL-25 frame@720*576,NTSC-30 frame@720*480
Input Frequency	950 to 2150 MHz		
Signal Input Level	- 65 to -25 dBm	Signal compatibility	Support conversion for different video formats
Band Switch Control	22KHz		
LNB Supply	13V/18V, IMax 400mA	Video Format	4:3,16:9,By Pan & Scan and Letter Box conversion
Demodulation Type	QPSK, 8PSK,16APSK		
Symbol Rate	2<Rs<45Mband(SCPC/MCPC)	Audio Decompression	MPEG-1 Layer I/II, MPEG-2 Layer I/II
DVB-T/T2/C INPUT/DEMOCLUTION		Audio Output Mode	Stereo, Mono,R/L
Connector Type	Female Type	DATA SERVICE PORT	
Input Frequency	48 to 862 MHz	Connector	USB
Signal Input Level	-79.5dBm (MAX)	Data Protocol	USB2.0 Interface
ANT Supply	5V, 12V/24V Imax 100mA	File Management System	NTFS,FAT32,FAT16
Demodulation Type	QPSK,16QAM,64QAM,256QAM	File Format	wma,mp3,mp4,avi,jpg,jpeg,bmp,img
LCD FEATURES		POWER SUPPLY	
LCD Type	TFT Transmissive	Li-Ion Battery	7.4V/5000mAh(The machine behind labeling shall prevail)
Number of Dots	800 x 3(RGB) x 480	Adapter	OUTPUT DC12V/1.5A, INTUPT :100-240VAC 50/60Hz(Will be subject to actual configuration)
Active area (WxH)	154.08 x 85.92 mm ²		
AV output Interface		Power Consumption	Max. 10W
Connector Type	3.5 mm jack		
Video Output	CVBS	PHYSICAL CHARACERSTICS	
Audio Output	Stereo Audio L/R output	Size (W x D x H)	25.3x17.1x5.4(cm ³)
HDMI output connector		Net Weight	1.3kg
Format	HDMI 1.3a		
AV Input Interface			
Connector Type	3.5 mm jack		
Video Input	CVBS		
Audio Input	Stereo Audio L/R Input		



