




... a link to the future



Product Information





DM54A 4010 / DM54A 4015 / DM54A 4020 / DM54A 4025
Indoor Satellite Tap offs

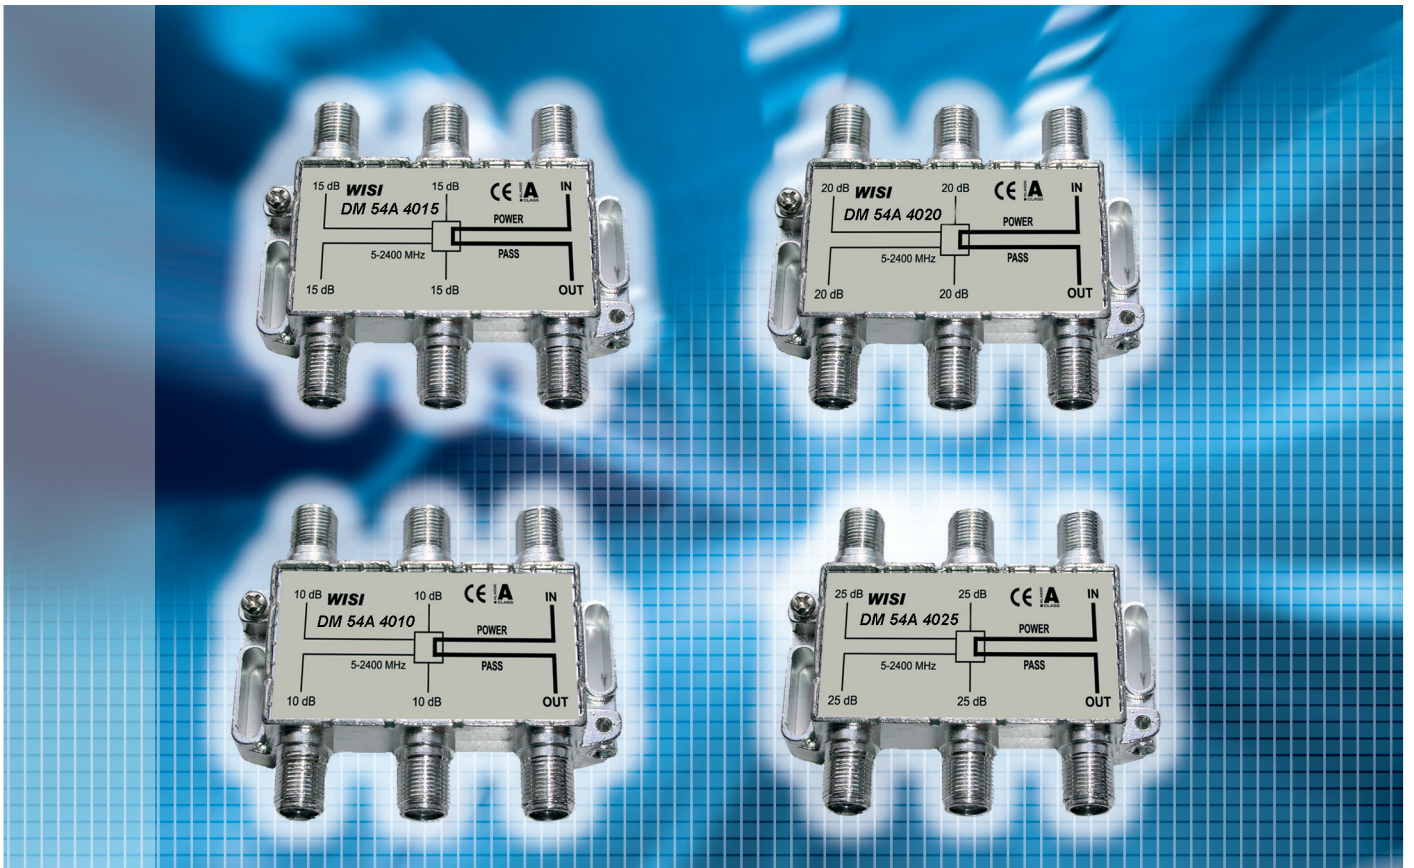

- 4 types with different tap loss values
- Frequency range from 5 to 2400 MHz
- Directional coupler
- Screening factor >85 dB, Class A
- DC-Bypass 1A / 30 V

DM 54A 4010 / 4015 / 4020 / 4025 Satellite Tap offs

Type	DM54A 4010	DM54A 4015	DM54A 4020	DM54A 4025	
	4-way tap off	4-way tap off	4-way tap off	4-way tap off	
Specifications	Thru loss 5-862 MHz	3.5 dB	2.5 dB	1.0 dB	0.6 dB
	Thru loss 862-2400 MHz	4.5-5 dB	4-5 dB	2-2.5 dB	1.8-2.5 dB
	Tap loss 5-862 MHz	11 dB	15 dB	20 dB	25 dB
	Tap loss 862-2400 MHz	12.5-14 dB	15 dB	20 dB	25 dB
	Directional attenuation 5-2400 MHz	≥ 25 dB	≥ 25 dB	≥ 25 dB	≥ 25 dB
	Isolation 5-2400 MHz	≥ 21 dB	≥ 21 dB	≥ 21 dB	≥ 21 dB
	Screening factor	>85 dB Class A	>85dB Class A	>85 dB Class A	>85 dB Class A
	DC-Bypass IN-OUT	yes	yes	yes	yes
	Dimensions / mm	74x58x18	74x58x18	74x58x18	74x58x18
	Packing unit	5 pieces, bag			
Shipping package	25 pieces 9,8 dm ³ , 3,6 kg				

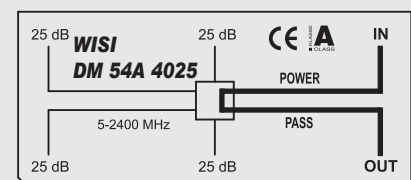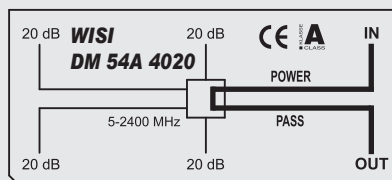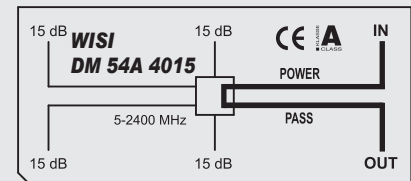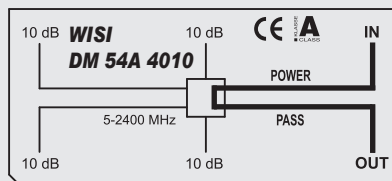

WISI Communications GmbH & Co. KG
 Empfangs- und Verteiltechnik
 P.O. BOX 1220
 75219 Niefern-Oeschelbronn, GERMANY
 Phone +49(0)7233/66-280
 Fax +49(0)7233/66-350
 www.wisi.de
 export@wisi.de

Technical Modifications reserved. WISI cannot be held liable for any printing error.
 083 886 / 09. 06

... a link to the future